


Horizontal dimensions

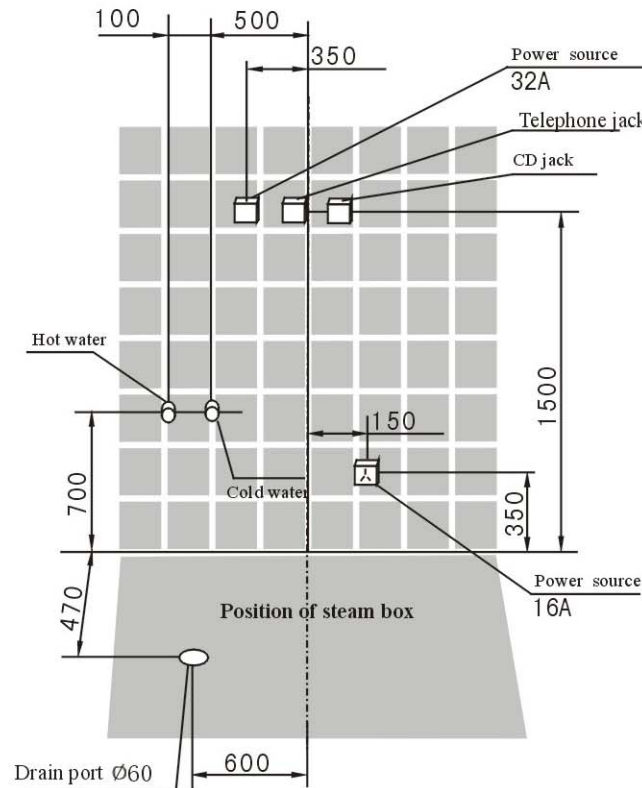

Vertical installation dimensions

Wellness

Dimensions for power & water Installation

MODEL: A-0734

SIZE: 1700X1100X2200

Installation

- A. Hot water: G1/2 zinc-plated pipe, 700mm high from the floor.
- B. Cold water: G1/2 zinc-plated pipe, 700mm high from the floor.
- C. Power supply: 220V/50Hz, single phase three wire system, with a load bearing capacity not lower than 32A. 1500mm high from the floor.
- D. Water draining: The drain port should not be located in an annular area of 100-200mm in radius, with the drain port shown in the illustration as center.

Notes:

1. Before you press the steam switch to start the steam system, normal cold water supply should be maintained, otherwise the steam generator would be damaged due to dry heating.
2. For F3 front control panel, jacks for telephone and CD should be pre-considered. The steam-shower box is supplied with a 5m CD cable.
3. Power source and water source should be provided with independent switch/stop valve, which should be located in a place convenient for their installation and use.
4. After use, always cut off water and electric supplies.